
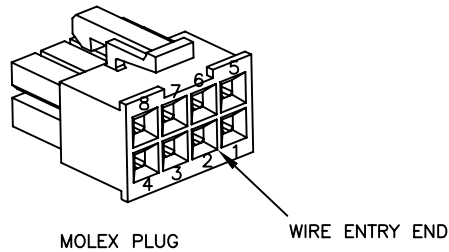


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	1	WIRE COLORS ADDED. LENGTH WAS 8 AND 15 FEET.	3 AUG 06	
	2	GENERAL	17 OCT 06	

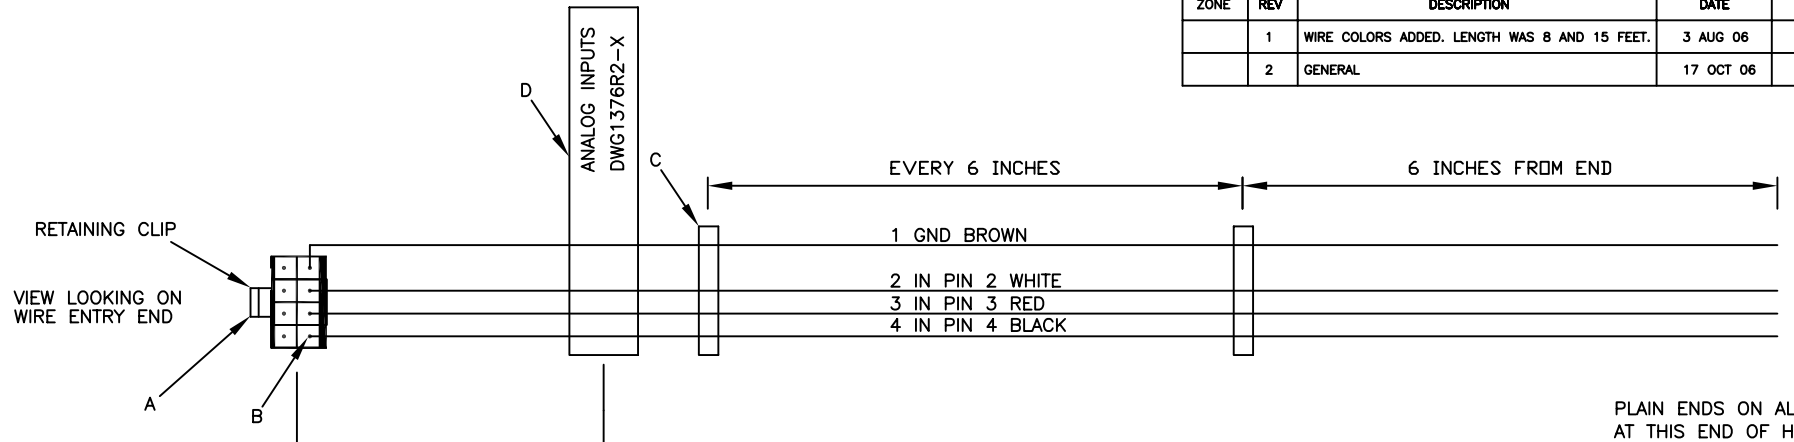

WIRE HARNESS PARTS LIST		
PART	QUANTITY	DESCRIPTION
A	1	DUAL ROW PLUG 2X4 8 POSITION MINIFIT JR MOLEX 39-01-2080
B	4	FEMALE CRIMP TERMINAL MOLEX 39-00-0039
C	AS REQUIRED	CABLE TIE
D	1	IDENTIFICATION LABEL
1 GND	1	BROWN
2 IN PIN 2	1	WHITE
3 IN PIN 3	1	RED
4 IN PIN 4	1	BLACK

USE THE FOLLOWING DESIGNATIONS FOR HARNESS LENGTHS

1376R2-5 5 FOOT HARNESS LENGTH.
 1376R2-8 8 FOOT HARNESS LENGTH.

WIRE HARNESS SPECIFICATION

WIRE SPEC: 18 GA. INSULATED STRANDED COPPER. TYPE TEW 105C 300V UL LISTED. COLOR AS SPECIFIED.
 CABLE TIES OR EQUIVALENT TO BE INSTALLED AT 6 INCH SPACING INTERVALS ALONG THE HARNESS LENGTH.
 THE COMPLETED CABLE ASSEMBLY TO BE IDENTIFIED WITH EITHER A TAG OR LABEL SECURELY ATTACHED.
 THE IDENTIFICATION TO BE: ANALOG INPUTS DWG1376R2-X. (X=5 OR 8).
 EQUIVALENT PARTS TO THOSE SPECIFIED MAY BE SUBSTITUTED PROVIDED THAT THEY ARE UL LISTED.
 ALL OTHER PARTS MUST BE UL LISTED.

		DYNAGEN TECHNOLOGIES INC.		
		GSC400 ANALOG INPUTS WIRE HARNESS.		
SIZE	DATE 24 JAN 06	DWG NO. 1376R2	REV	
SCALE: N T S		DRAWN DL	APPROVED	